臺北/松山機場
TAIPEI/SONGSHAN AD

RCSS
ILS Z RWY10

TAIPEI APP	SONGSHAN TWR	ATIS
119.7 119.6 125.1	118.1	127.4 341

Apt Elev: 18' Rwy10 THR Elev: 13' Trans Level: FL130 Trans Alt: 11,000'

BEARINGS ARE MAGNETIC; DISTANCES ARE NAUTICAL MILES; ELEVATIONS, HEIGHTS IN FEET

VAR 5° W-2022

9100'
MSA ARP 25NM

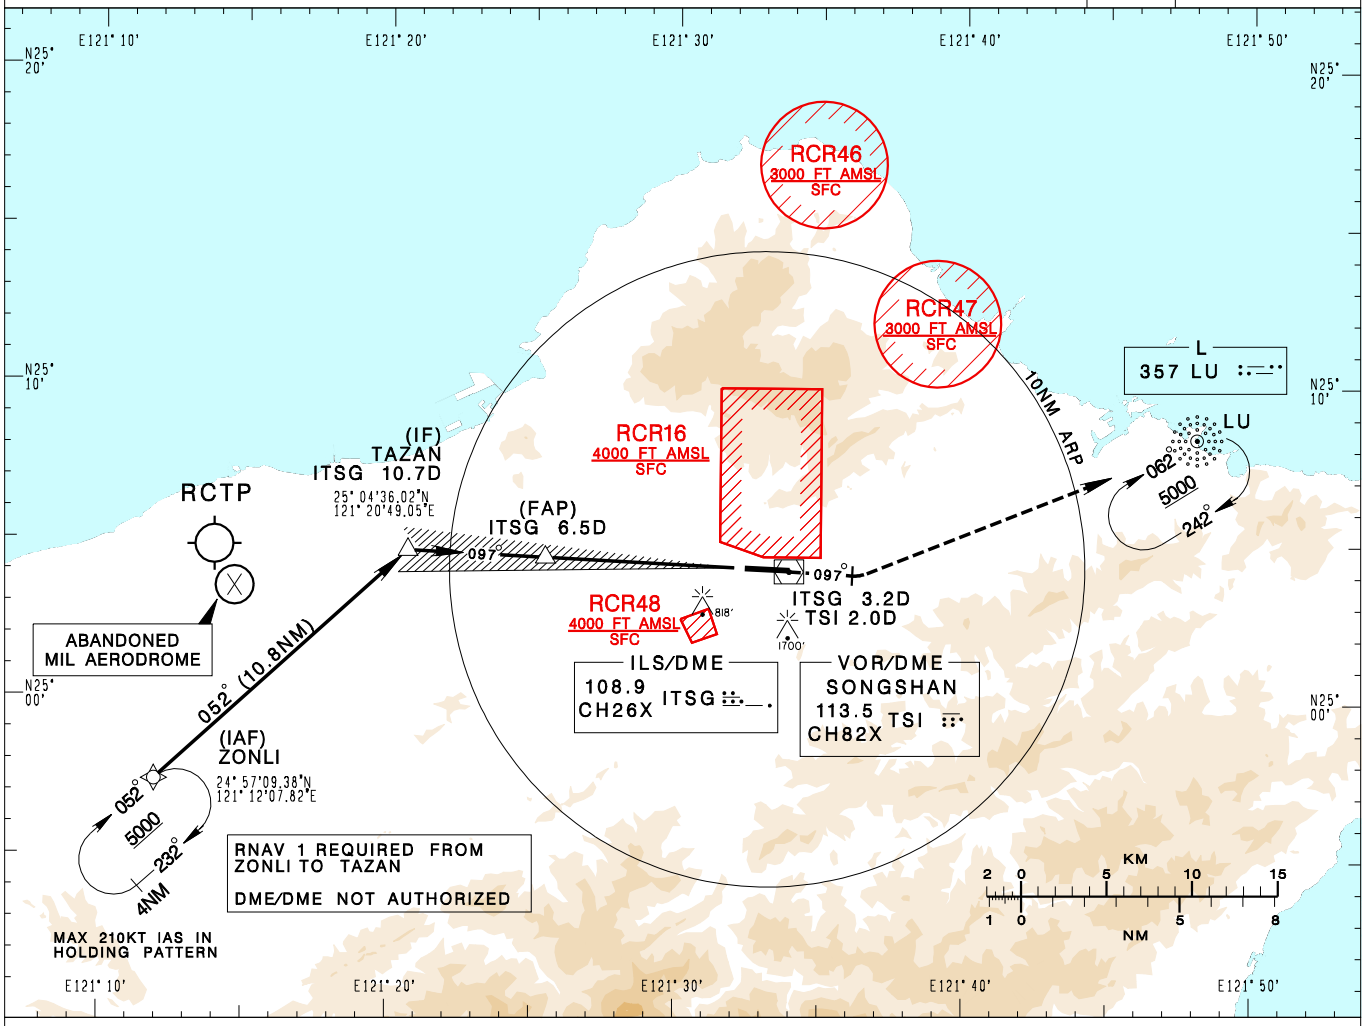

MISSED APCH:
CLIMB ON HDG 097 UNTIL ITSG 3.2D/TSI 2.0D, THEN TURN LEFT DIRECT TO LU, CLIMB TO 5000 AND HOLD.
IF UNABLE TO REACH 5000 AT LU, ADVISE ATC FOR RADAR VECTOR.

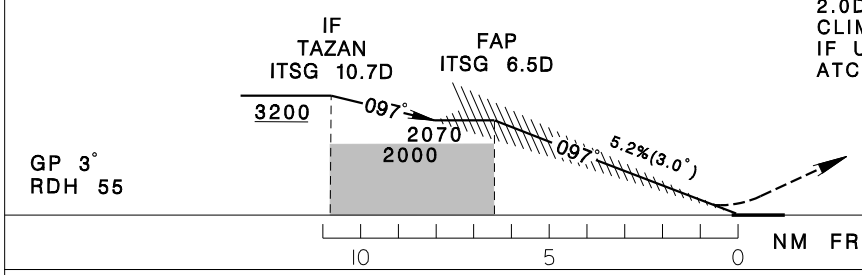

NOTE
WHEN LU IS NOT AVAILABLE,
MISSED APCH:
CLIMB ON HDG 097 UNTIL ITSG 3.2D/TSI 2.0D, THEN TURN LEFT HDG 070, CLIMB TO 5000, EXPECT RADAR VECTOR.

MINIMA (OCA IN FT, VIS IN M, OCH IN FT)

CATEGORY		A	B	C	D
STRAIGHT IN	MA minima climb gradient 4% (244ft/NM)	224/RVR 800/750 211	234/RVR 800/750 221	244/RVR 800/750 231	253/RVR 800/750 240
	MA minima climb gradient 2.5% (152ft/NM)	627/2100 614	637/2200 624	647/2200 634	657/2300 644
STRAIGHT IN (ALS OUT)	MA minima climb gradient 4% (244ft/NM)	224/RVR 1200/1200 211	234/RVR 1200/1200 221	244/RVR 1200/1200 231	253/RVR 1200/1200 240
	MA minima climb gradient 2.5% (152ft/NM)	627/2800 614	637/2900 624	647/2900 634	657/3000 644
CIRCLING		1180/3600 1162	N/A		

NOTE
1. A 1700ft-HIGH BUILDING AT 2.1 NM SOUTH OF THR 28.
2. A 818ft-HIGH BUILDING AT 2 NM SW OF THR 10.
3. CIRCLING ONLY AUTHORIZED FOR CAT A HELICOPTERS.
4. ATS SURVEILLANCE REQUIRED.

*DME REQUIRED.

CHANGES: NEW CHART