


**臺南機場**  
TAINAN AD

**RCNN SID**  
**TAINAN 1 RADAR**

KAOSIUNG APP 124.7 363.8	TAINAN TWR 118.4 236.6 126.18	GROUND 121.6	ATIS NIL	VAR 3° W		
Apt Elev: 64'		Trans Level: FL130				Trans Alt: 11,000'
BEARINGS ARE MAGNETIC; DISTANCES ARE NAUTICAL MILES; ELEVATIONS, HEIGHTS IN FEET					MSA TNN 25NM	

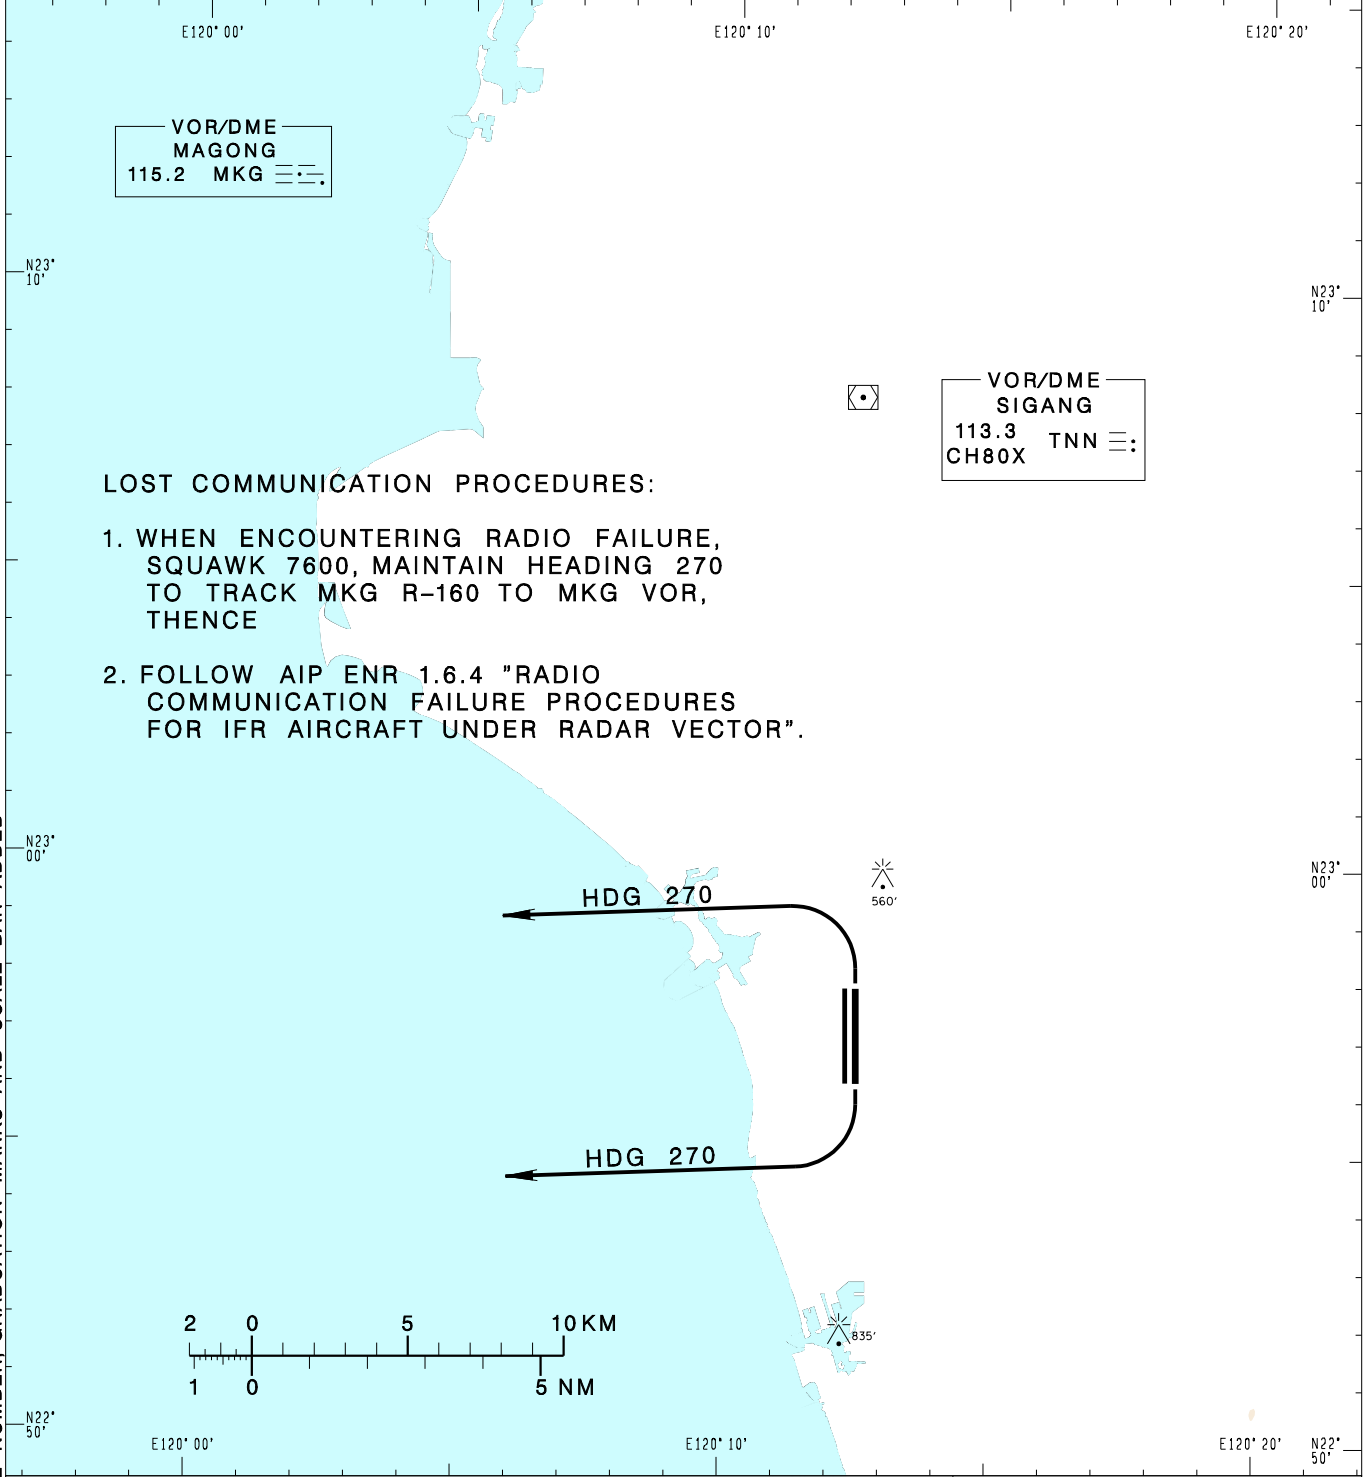

CHANGES: NEW PAGE NUMBER, GRADUATION MARKS AND SCALE BAR ADDED

**TAINAN ONE RADAR DEPARTURE**  
**RWY18L:** After departure, turn right HDG 270 climbing to ATC assigned altitude for vectors to assigned route/fix.  
**RWY36R:** After departure, turn left HDG 270 climbing to ATC assigned altitude for vectors to assigned route/fix.

**NOTE**  
 1. For RWY18L: Requires a minimum climb gradient of 3.8%(235ft/NM) until 1,200ft.  
 2. For RWY36R: Requires a minimum climb gradient of 6.7%(410ft/NM) until 1,000ft, with a speed restriction of 220KT IAS maximum until established on HDG 270.