


臺北/松山機場
TAIPEI/SONGSHAN AD

RCSS
SID

TAIPEI APP 119.7 119.6 125.1			SONGSHAN TWR 118.1		ATIS 127.4 341		VAR 4° W 
Apt Elev: 18'		Trans Level: FL130		Trans Alt: 11,000'		MSA TSI 25NM	
BEARINGS ARE MAGNETIC; DISTANCES ARE NAUTICAL MILES; ELEVATIONS, HEIGHTS IN FEET							

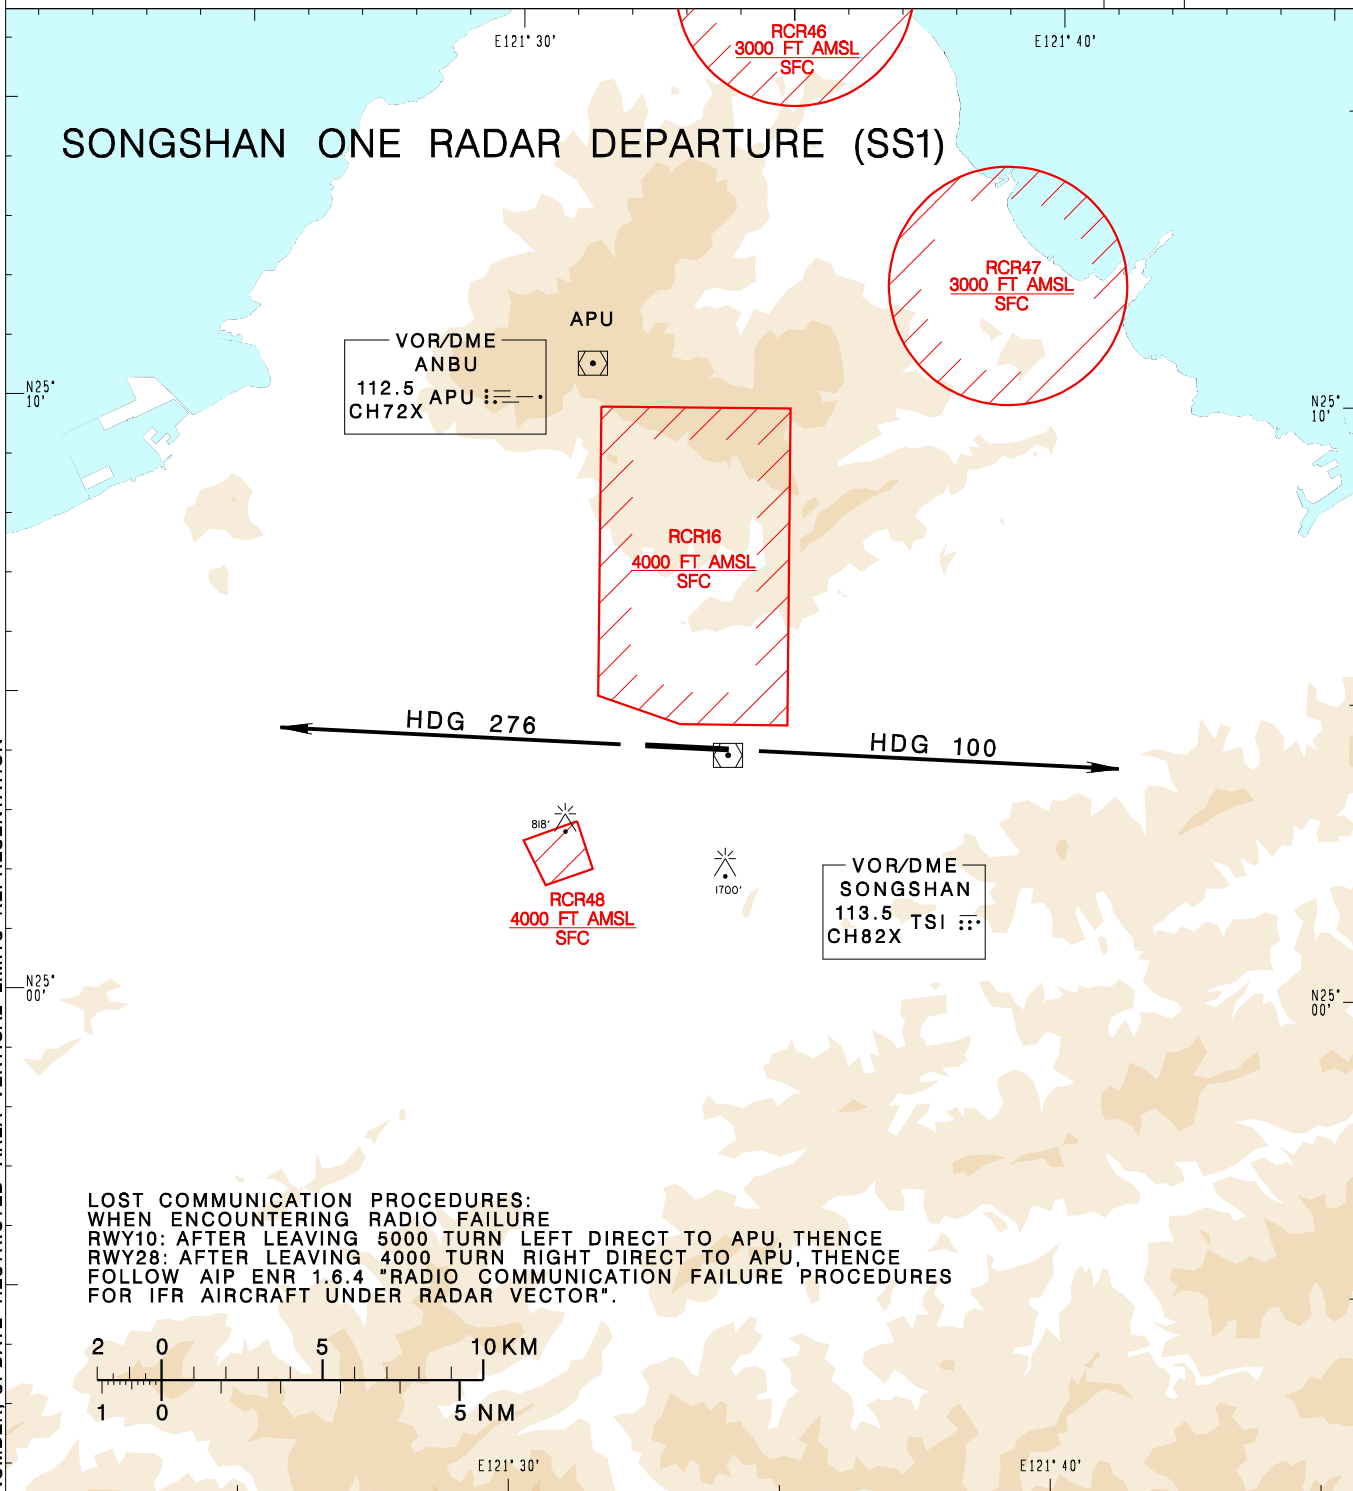

LOST COMMUNICATION PROCEDURES:
WHEN ENCOUNTERING RADIO FAILURE
RWY10: AFTER LEAVING 5000 TURN LEFT DIRECT TO APU, THENCE
RWY28: AFTER LEAVING 4000 TURN RIGHT DIRECT TO APU, THENCE
FOLLOW AIP ENR 1.6.4 "RADIO COMMUNICATION FAILURE PROCEDURES
FOR IFR AIRCRAFT UNDER RADAR VECTOR".

RWY10:
Depart HDG 100 climbing to ATC assigned altitude for vectors to assigned route/fix.

RWY28:
Depart HDG 276 climbing to ATC assigned altitude for vectors to assigned route/fix.

NOTE

1. Minimum climb gradient required:
RWY10: 7.0% (425ft/NM) until 4,000ft
RWY28: 7.4% (450ft/NM) until 4,000ft
2. Caution high terrain around airport.
3. A 1700ft-high BLDG at 2.1NM south of THR 28.
4. A 818ft-high BLDG at 2 NM SW of THR 10.

CHANGES: NEW PAGE NUMBER, UPDATE RESTRICTED AREA, VERTICAL LIMITS REPRESENTATION